

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number  
**WO 2004/000693 A1**

(51) International Patent Classification<sup>7</sup>: **B65D 90/02**,  
81/38 // 111:00

Michael, Steen [DK/DE]; Klueser Weg 1B, D-24939  
Flensburg (DE).

(21) International Application Number:  
PCT/DK2003/000415

(74) Agent: **ZACCO DENMARK A/S**; Hans Bekkevolds Allé  
7, DK-2900 Hellerup (DK).

(22) International Filing Date: 20 June 2003 (20.06.2003)

(25) Filing Language: Danish

(26) Publication Language: English

(30) Priority Data:  
PA 2002 00958 21 June 2002 (21.06.2002) DK

(71) Applicant (for all designated States except US): **MÆRSK  
CONTAINER INDUSTRI AS** [DK/DK]; Bjerndrupvej  
47, DK-6360 Tinglev (DK).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-  
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE  
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,  
RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(72) Inventor; and

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

(75) Inventor/Applicant (for US only): **DEGERMANN**,

[Continued on next page]

(54) Title: A THERMALLY INSULATED CONTAINER AND USE THEREOF

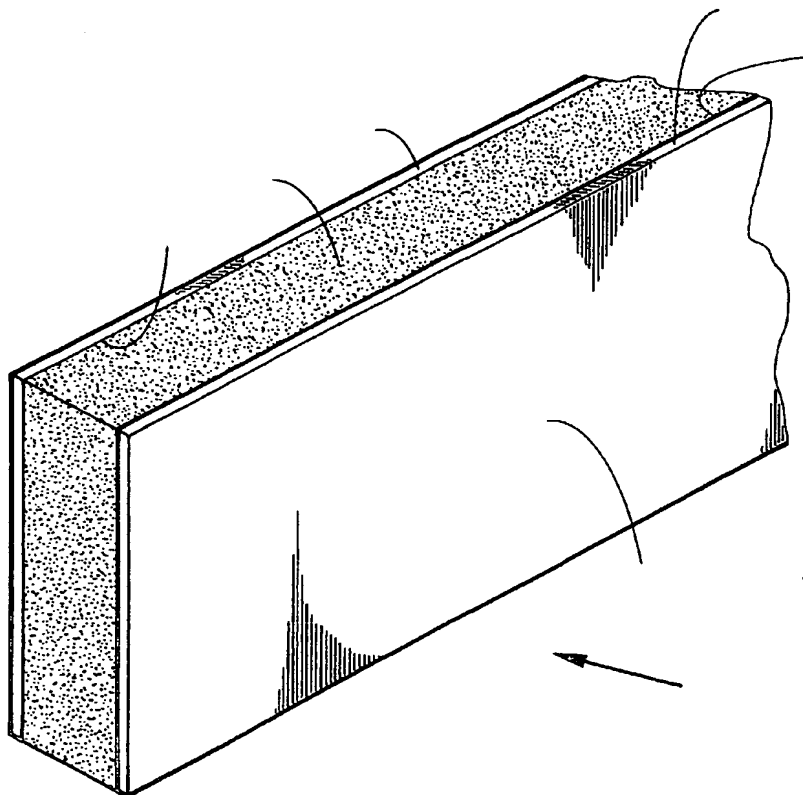

(57) Abstract: A thermally insulated container (101) for the transport of cargo (102), said container (101) comprising panels (103) comprising at least one outer layer/wall (104) and at least one inner layer/wall (105), between which layers/wall foam material (106) is arranged, and wherein the foam material is an essentially closed-cell foam material, said cells (107) enclosing at least two gases (108), said gases (108) having a value  $\lambda$  for thermal conductivity which is lower than that of atmospheric air, Hereby a container is obtained, whose insulating properties are good, while simultaneously the used materials are environmentally satisfactory, and wherein these insulating properties remain essentially intact for number of years.